

HIGH SPEED DOME CAMERA

DSC-600SE




444X ZOOM, 550TVL
WDR, TDN, 0.00005Lux

FEATURES

- 1/4" Sony Double Density interline CCD
- 37x AF Optical Zoom x12 Digital Zoom(Total 444X Zoom)
- Horizontal Resolution more than 550TV Lines
- Day & Night (ICR), Great Low Illumination with DSS, 0.00005 Lux.
- SSNR (Noise Reduction at Low Light), Wide Dynamic Range(126X)
- Smart Zoom (Speed control by Zoom ratio), 250 Programmable Preset Positions
- Swing, Group, Trace, Spiral, Auto Flip, Alarm, 16 Privacy Masking Zones
- DIS (Digital Image Stabilizer)-Protecting from shaking, Motion Detection, Weather-proof(IP66)
- Suits for Factory, Military Base, Outside, Building etc.

DIMENSIONS

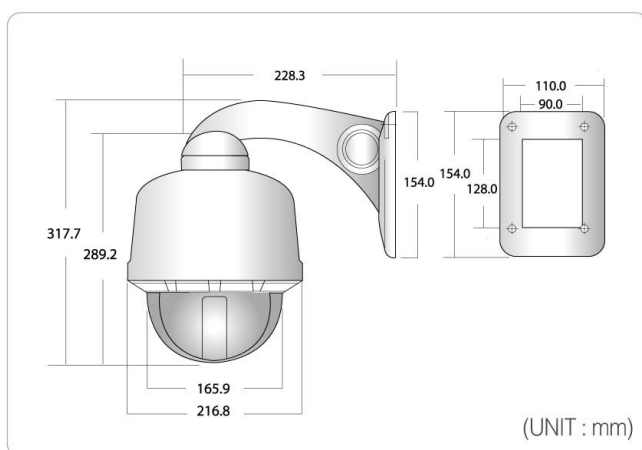

SPECIFICATIONS

MODEL	DSC-600Se	
Signal system	NTSC	PAL
Image sensor	1/4" Sony Double Density interline CCD	
Effective pixels	768(H) × 494(V)	752(H) × 582(V)
Horizontal resolution	Color : 550 TVL, B/W 680 TVL	
Lens	37x Optical zoom, f=3.5-129.5mm	
Digital zoom	12x (Total zoom 444x)	
Angle of view	H : 55.5° ~1.59°, V : 42.5° ~1.19°	
Minimum illumination	0.5 Lux, 0.1Lux(D&N), Min 0.00005Lux(DSS), / F1.6	
Luminance S/N ratio	More than 52dB	
Video output	1 Vp-p Composite video output 75Ω	
Focus mode	Auto / Manual / Oneshot	
SSNR	Off / Low / Middle / High	
WDR	On/ Off	
Shutter speed	Auto / 1/120 ~ 1/60,000 sec	
Sharpness control	Level (0-10)	
Stabilizer	On/Off	
Alarm in/out	4 Inputs / 1 Relay Output	
Pan/Tilt angle	360° Endless / 92°	
Pan speed	0.1° ~ 240°/sec (64 Levels)	
Preset point	250 Presets	
Preset Speed	Max 360°/sec (64 Levels)	
Privacy zones masking	16 Zones	
Operating temperature	-40°C ~ 50°C (-14°F ~ 122°F)	
Communication system	RS-485 / 422	
Operating Fan/Heater	Over than 45°C / Less than 5°C	
Operating humidity	Less than 90%RH	
Dimensions	216.8(Diameter)/mm x 289.2(Height)/mm	
Weight	About 5.2Kg (Without adaptor)	
Construction	Aluminum body, Clear vandal bubble (PC)	
Power consumption	21W (Max)	
Power supply	AC24V, 60/50 Hz	

OPTIONAL ACCESSORIES



DSC-30EWP



DSC-20ECP



DSC-20PMA



DSC-20CMA

Selection

Option